






FAG635

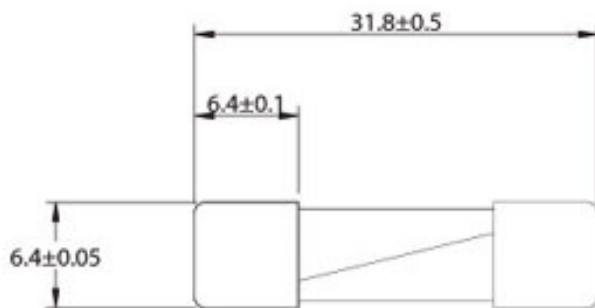


FAG635-P

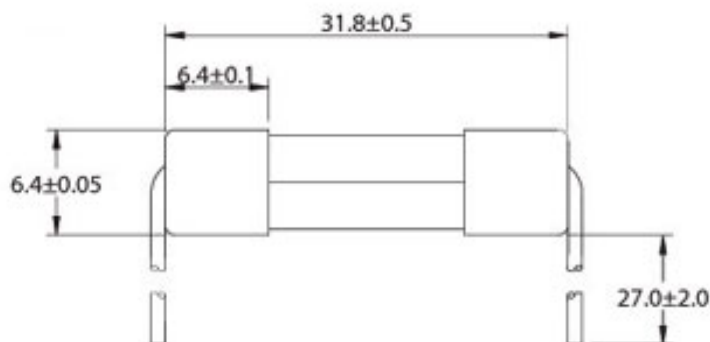

FAG635-PA

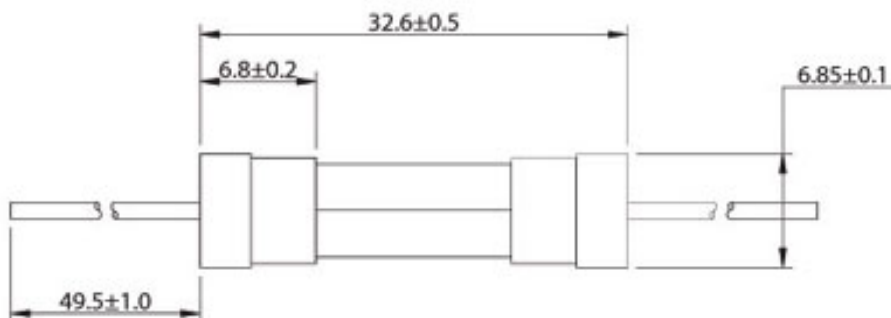

FAG635-PR

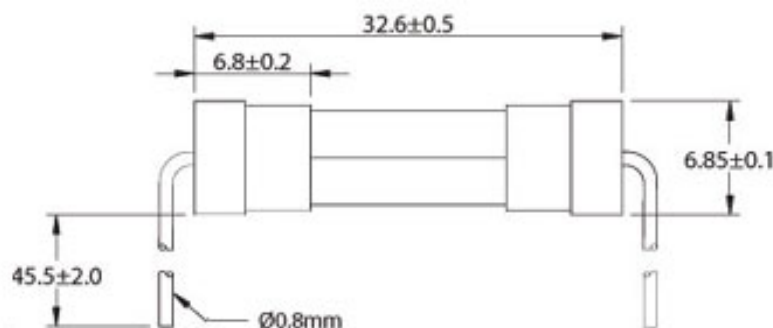

Construction: Glass Tube
 Rated current: 0.05A-30A
 Rated Voltage: 125V/250V
 Approvals: UL, CSA, JIS
 From: 0.1-8A 125V/250V, 10A 125V

Electrical Characteristic

Rated Current	1.1 In	1.35 In	2 In
In	Min.	Max.	Max.
50mA-30A	4 h	3600 S	120 S



FAG635 Series
Fast Acting, Glass Tube

Part Number	Rated Current	Breaking Capacity	Rated Voltage		
FAG635-0.050-__	50mA	35A @ 250V/AC 10KA @ 250V/AC	125V/250V		
FAG635-0.060-__	60mA				
FAG635-0.063-__	1/16A				
FAG635-0.070-__	70mA				
FAG635-0.080-__	80mA				
FAG635-0.100-__	100Ma				
FAG635-0.125-__	125mA				
FAG635-0.160-__	160mA				
FAG635-0.200-__	200mA				
FAG635-0.250-__	250mA				
FAG635-0.300-__	300mA				
FAG635-0.315-__	315mA				
FAG635-0.400-__	400mA				
FAG635-0.500-__	500mA				
FAG635-0.600-__	600mA				
FAG635-0.630-__	630mA				
FAG635-0.700-__	700mA				
FAG635-0.800-__	800mA				
FAG635-001-__	1A				
FAG635-1.25-__	1.25A				
FAG635-1.50-__	1.5A				
FAG635-1.60-__	1.6A				
FAG635-002-__	2A	100A @ 250V/AC 10KA @ 125V/AC	125V/250V		
FAG635-2.50-__	2.5A				
FAG635-003-__	3A				
FAG635-3.15-__	3.15A				
FAG635-3.50-__	3.5A				
FAG635-004-__	4A	200A @ 250V/AC 10KA @ 125V/AC		125V/250V	
FAG635-005-__	5A				
FAG635-006-__	6A				
FAG635-6.30-__	6.3A				
FAG635-007-__	7A				
FAG635-008-__	8A				
FAG635-010-__	10A				
FAG635-012-__	12A	1000A @ 32V/AC			32V
FAG635-013-__	13A				
FAG635-015-__	15A				
FAG635-016-__	16A				
FAG635-020-__	20A				
FAG635-025-__	25A				
FAG635-030-__	30A				

Style Options: Nil = Axial w/o Leads
P = Radial Straight Leads
PA = Axial with Leads
PR = Radial Bent Leads
ex. FAG635-3.15-PR