



Features:

- Single-Turn Cermet Trimmer/Industrial/Sealed.
- 6mm (1/4") Square.
- Higher rated power thanks to the use of cermet resistor element.
- Excellent reliability for heat and humidity.
- Tighter resistance tolerances available.
- RoHS compliant version available, add suffix "LF" to part number.



Characteristics:



Electrical Characteristics	
Standard Resistance Range	10Ω ~2MΩ
Resistance Tolerance	±10%
Absolute Minimum Resistance	≤1% or 10Ω (whichever is greater)
Contact Resistance Variation	CRV ≤ 3% or 5Ω (whichever is greater)
Insulation Resistance	R1 ≥ 1GΩ (500Vac)
Withstand Voltage	707Vac
Effective Travel	250°.
Environmental Characteristics	
Power Rating(315 volts max)	0.25W @ 70°C 0W @ 100°C
Temperature Range	-55°C ~ 100°C
Temperature Coefficient	±100ppm/°C
Temperature Variation	-55°C, 30min, +100°C 30min 5 cycles ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 5%
Vibration	10 ~ 500Hz, 0.75mm, 6h ΔR ≤ 2%R, Δ(Uab, Uac) ≤ 7.5%
Collision	390m/s ² , 4000 cycles, ΔR ≤ 5%R
Electrical Endurance at 70°C	0.25W @ 70°C 1000h, ΔR ≤ 10%R CRV ≤ 3% or 5Ω
Rotational Life	200 cycles ΔR ≤ 10%R CRV ≤ 3% or 5Ω
Physical Characteristics	
Starting Torque	≤ 30mN
Marking	Resistance Code, Model, DC
Standard Packaging	50pcs, per tube

Dimensions:

Tolerances: ±0.25mm(0.01") IF NOT IDENTIFIED

Units of dimensions: $\frac{\text{mm}}{\text{(inches)}}$

Install Dimensions:

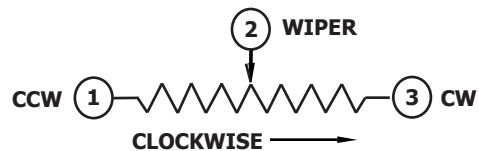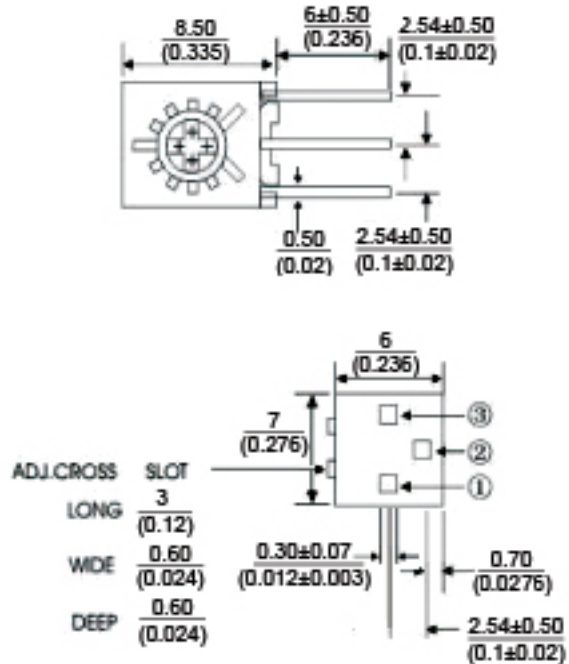

Part Numbering System

Part Number	Resistance (Ohms)	Part Number	Resistance (Ohms)
3323S-1-100__	10	3323S-1-203__	20,000
3323S-1-200__	20	3323S-1-253__	25,000
3323S-1-500__	50	3323S-1-503__	50,000
3323S-1-101__	100	3323S-1-104__	100,000
3323S-1-201__	200	3323S-1-204__	200,000
3323S-1-501__	500	3323S-1-254__	250,000
3323S-1-102__	1,000	3323S-1-504__	500,000
3323S-1-202__	2,000	3323S-1-105__	1,000,000
3323S-1-502__	5,000	3323S-1-205__	2,000,000
3323S-1-103__	10,000		

Nil = 90% Tin, 10% Lead plated
LF = 100% Tin plated (RoHS compliant)

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.