



# Series: ED

## Stamped Dip Socket

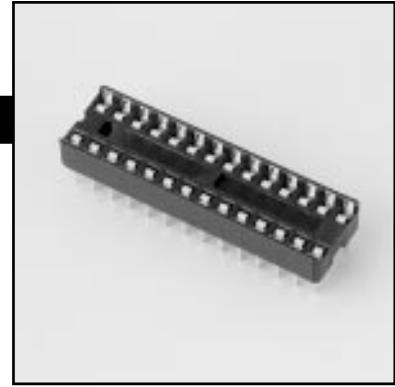

- ❖ Dual wipe contacts
- ❖ Closed bottom design to prevent wicking
- ❖ Side and end stackable
- ❖ Pin 1 polarized
- ❖ Optional retention leg

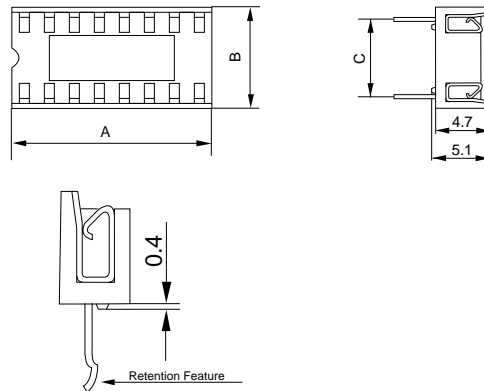

Ordering example: **ED - 28 DT**

Positions	A	B	C
06	7.62	10.16	7.62
08	10.16	10.16	7.62
14	17.78	10.16	7.62
16	20.32	10.16	7.62
18	22.86	10.16	7.62
20	25.40	10.16	7.62
22*	27.94	10.16	7.62
24	30.48	17.78	15.24
24*	30.48	10.16	7.62
28	35.56	17.78	15.24
28*	35.56	10.16	7.62
32	40.64	17.78	15.24
40	50.80	17.78	15.24
48	60.96	17.78	15.24

\*Add 1 for 7.62 spacing on 22(1), 24(1) and 28(1) position

# Specifications

## Stamped Dip Socket Series:

### ED

#### Ratings:

Current	1A
Voltage	10 mV - 60 V
Dielectric strength	> 1000 V (RMS)
Contact resistance	20 mΩ
Insulation resistance	5000 Ω min.

#### Material:

Plastic	PBT Glass-filled, UL94V-0
Color	Black
Contact	Phosphor Bronze
Temperature range	-55°C / +110°C, 260°C for 5 sec. (solder bath resistant)

## ORDERING PROCEDURE

1 - 2 3 4 - 5

- 1) Series
- 2) Number of Positions (see chart for available positions)
- 3) Contact style:
  - D = Dual wipe
- 4) Plating:
  - T = Tin
- 5) Options:
  - CA = Capacitor
  - J = Retention leg

Please refer to following pages for ordering examples.