


Contacts	Dimension mm		Type
	A	B	
06	5.08	7.62	Without Bar
08	7.62	10.16	
10	10.16	12.70	
12	12.70	15.24	
14	15.24	17.78	
16	17.78	20.32	
18	20.32	22.86	With Bar
20	22.86	25.40	
22	25.40	27.94	
24	27.94	30.48	
28	33.02	35.56	
32	38.10	40.64	

### Specifications

Contact Rating: 3A / Contact max.  
 Contact Resistance: ≤4mΩ max.  
 Insulation Resistance: ≥ 1000MΩ at V = 100V  
 Operating Voltage: 60 VAC / DC

Pin (outer sleeve): Brass, machined CuZn38Pb2  
 Pin Plating: Tin Plated: 2um/80μ" Ni, 5 um/200μ" Sn  
 Clip (contact 4 finger): Beryllium Copper,  
 Phosphor Brozen heat treated  
 Clip Plating: Gold Plated: 2um/80μ" Ni, Full Gold  
 Insulator (black): Glass filled UL94V-0

### Part Numbering System

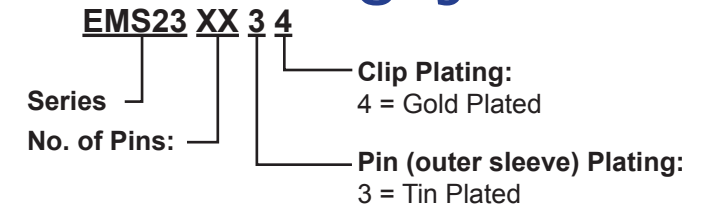

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X' ± 2°
.XX ± 0.10	.XX' ± 1°
Units : mm	