


5.00mm Pitch




	cRU[®]us
Rated Voltage	300V
Rated Current	15A
Insulation Withstand Voltage	AC 2000V / Min
Insulation Resistance	500MΩ or More at DC500V
Temperature Range	-40°C to +105°C
Wire Range	14-22 AWG
Screw Torque	0.4Nm





Units: mm



PCB LAYOUT
S=2:1



- ① Housing: PA66(V0)
- ② Solder Pin: Brass, Tin Plated
- ③ Spring Coil: Stainless Steel
- ④ Screw: Steel, Zinc Plated

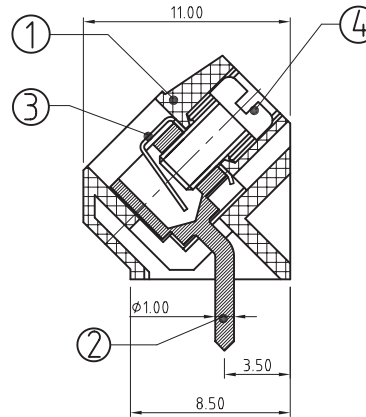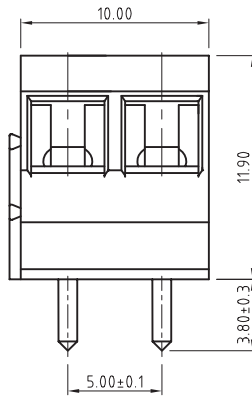

Part Numbering System:

110-500 - XXP - XXX - X

① ② ③ ④

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 24
- ③ Insulator Color: GRN = Green, BLK = Black, BLU = Blue
- ④ Screw: S = Slot, C = Cross

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	10	15	20	25	30	35	40	45	50	55	60	65
Dim A	5	10	15	20	25	30	35	40	45	50	55	60
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	70	75	80	85	90	95	100	105	110	115	120	
Dim A	65	70	75	80	85	90	95	100	105	110	115	