




**Features:**

- 9mm (3/8") Square Singleturn
- Cermet Trimmer/Industrial/Sealed.
- Many Terminal Styles
- RoHS compliant



**Characteristics:**

Electrical Characteristics	
Standard Resistance Range	10Ω ~2MΩ
Resistance Tolerance	±10%
Absolute Minimum Resistance	≤1% or 2Ω
Contact Resistance Variation	≤3% or 3Ω
Insulation Resistance	R1 ≥ 1GΩ
Withstand Voltage	600Vac
Effective Travel	300° normal
Environmental Characteristics	
Power Rating(315 volts max)	0.50W @ 70°C 0W @ 125°C
Temperature Range	-55°C ~ 125°C
Temperature Coefficient	±100ppm/°C
Vibration	10 ~ 500Hz, 0.75mm, 6h ΔR ≤ 5%
Shock	390m/s <sup>2</sup> , 4000 cycles, ΔR ≤ 5%
Electrical Endurance at 70°C	0.25W @ 70°C 1000h, ΔR ≤ 10%
Rotational Life	200 cycles ΔR ≤ 5%
Physical Characteristics	
Starting Torque	≤ 35mN
Flammability	UL94V-0
Marking	Resistance Code, Model
Standard Packaging	50pcs, per tube

**Part Numbering System**



**3386P - 1 - 103 - LF**

LF = Lead Free

Model	Resistance Code	Resistance (Ohms)	Resistance Code	Resistance (Ohms)
3386B				
3386C				
3386F				
3386FT (with Knob)				
3386G				
3386H				
3386J				
3386K				
3386M				
3386P				
3386PT (with Knob)				
3386R				
3386S				
3386T				
3386U				
3386V				
3386W				
3386X				
3386XT (with Knob)				
3386H-EY5				
3386X-EY5				
3386P-EY5				

**Dimensions:**

Tolerances: ±0.25mm(0.01") IF NOT IDENTIFIED  
Units of dimensions:  $\frac{\text{mm}}{\text{(inches)}}$

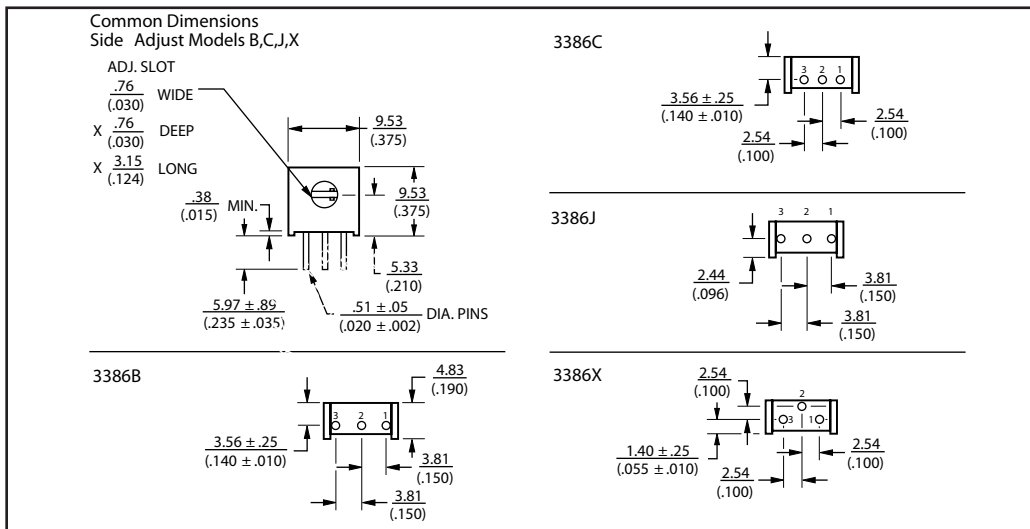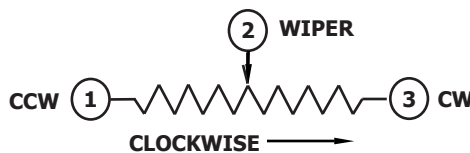

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

