





5.00mm x 8.20mm Pitch

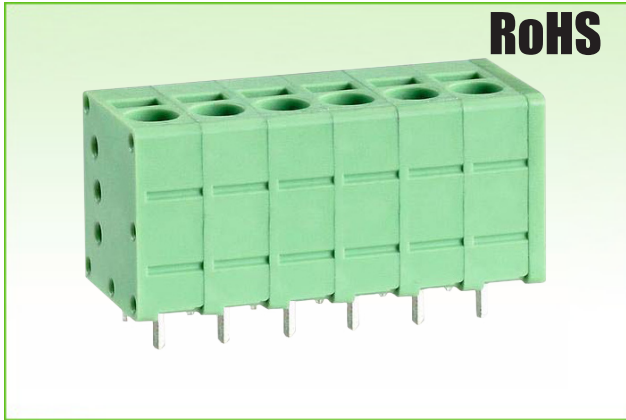

		
Rated Voltage	300V	320V
Rated Current	20A	24A
Insulation Withstand Voltage	2500V / Min.	
Rated Surge Voltage	4000V	
Insulation Resistance	500MΩ or more at DC500V	
Temperature Range	-40°C to +115°C	
Wire Range	26-12AWG	0.2mm ² -2.5mm ² Sol & Str 4.0mm ² Sol
Strip Length	10mm	
Wire Orientation	90° (Wire-to-Board)	
Operating Temperature	-40°C ~ +105°C	
Soldering	Single Wave, 260°C 5 Sec Max Double Wave, 260°C 10Sec Max.	

Units: mm

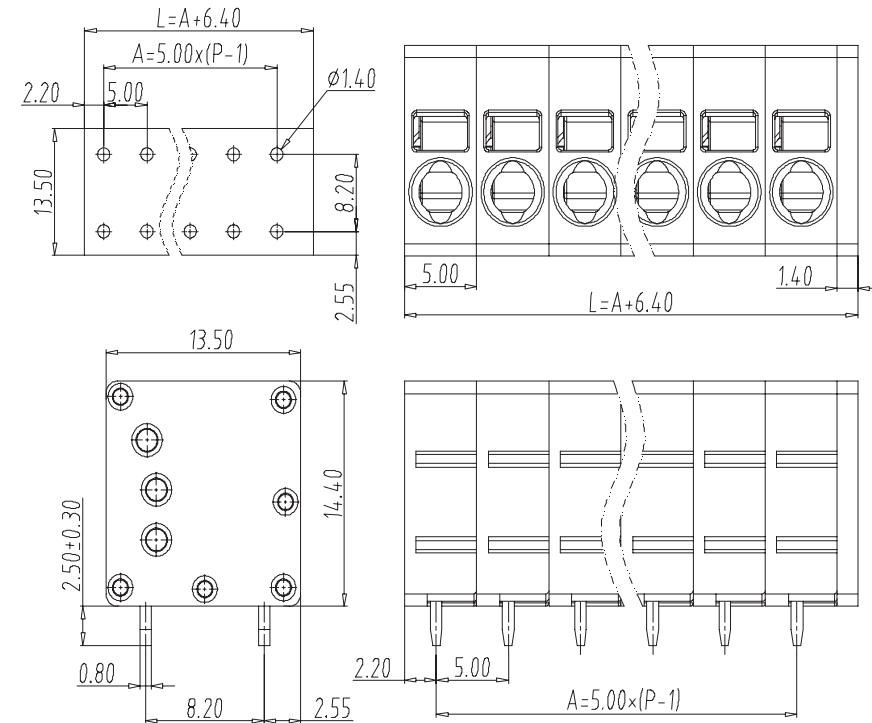

- ① Housing: PA66, UL94V-0
- ② Solder Pin: Copper Alloy, Tin Plated
- ③ Clamp Spring: Stainless Steel

Part Numbering System:

512-500V - XXP - XXX

① ② ③

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 24
- ③ Insulator Color: GRN = Green, BLK = Black, ORG = Orange