





7.50mm Pitch

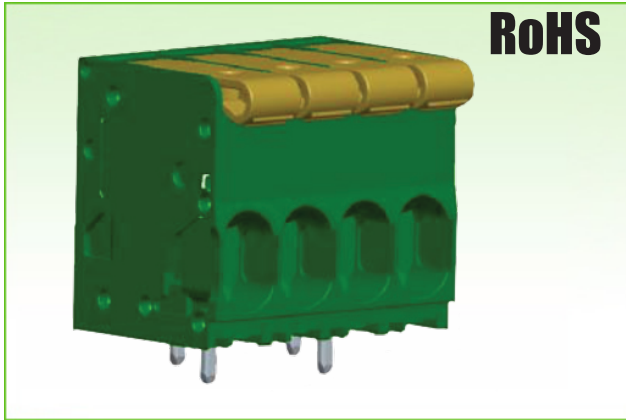

		
Rated Voltage	600V	1000V
Rated Current	35A	41A
Insulation Withstand Voltage	2200V / Min.	
Insulation Resistance	500MΩ or more at DC500V	
Rated Surge Voltage	8KV	
Wire Range	24-8AWG	0.2mm ² -6mm ² & 10MM ² (STR)
Strip Length	12-13mm	
Wire Orientation	180° (Wire-to-Board)	
Operating Temperature	-40°C ~ +115°C	
Soldering	Single Wave, 260°C 5 Sec Max Double Wave, 260°C 10Sec Max.	

Units: mm

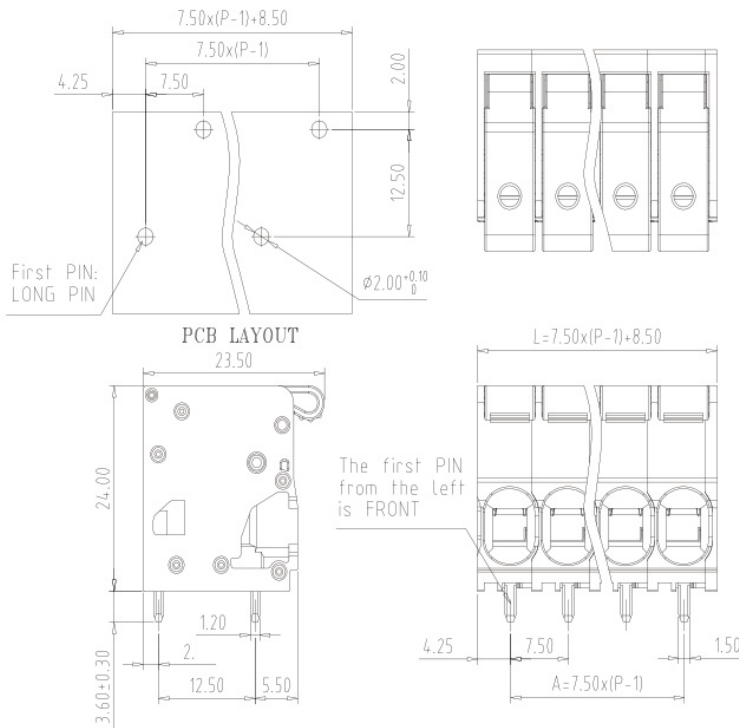

- ① Housing: PA66, UL94V-0
- ② Solder Pin: Copper Alloy, Tin Plated
- ③ Clamp Spring: Stainless Steel (GrNi)

Part Numbering System:

519-750RB - XXP - XXX

- ① ② ③

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 12
- ③ Insulator Color: GRN = Green