


Light Emitting Diode Lamp

Package Dimensions

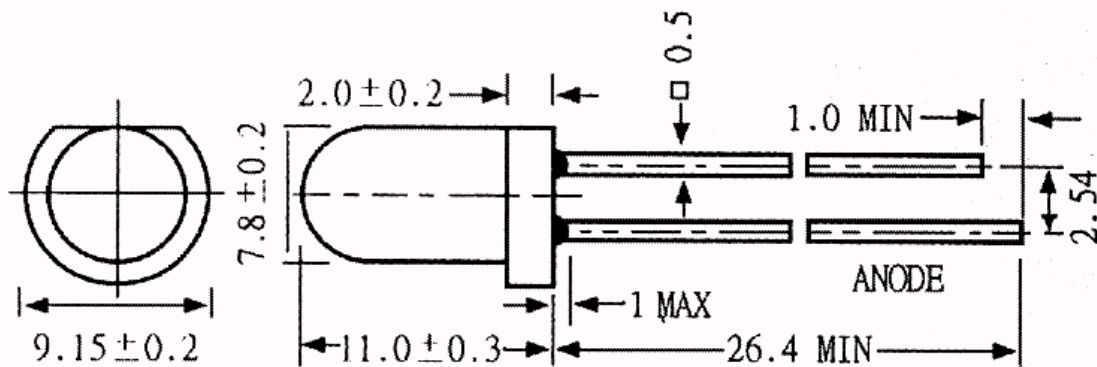

NOTE:

1. All dimensions are in millimeter.
2. Lead spacing is measured where the lead emerge from the package.

Selection Guide

Part NO.	Chip		Lens Color	Viewing Angle 2θ 1/2(deg)
	Material	Emitted Color		
8-22A-CD35R	GaAsP/GaP	Hi-eff Red	Red Diffused	60

Light Emitting Diode Lamp

Part No: 8-22A-CD35R

★Absolute Maximum Ratings (Ta=25 °C)


Parameter	Symbol	MAX. Rating	Unit
Power Dissipation	Pd	65	mW
Continuous Forward Current	IF	50	mA
Pak forward current(10 μ s Pulse)	IFM	100	mA
Reverse Voltage	VR	5.0	V
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +85	°C
Lead Soldering Temperature (1.6mm From Case Bottom) 260°C For 5 SEC			

★Electric-Optical Characteristics

Parameter	Symbol	Test Condition	MIN	TYP	MAX	Unit
Forward Voltage	VF	IF=20mA		2.1	2.6	V
Reverse Voltage	VR	IF=10uA	5			V
Luminous Intensity	IV	IF=20mA	20	30		mcd
Peak Emission Wavelength	λ	IF=20mA		635		nm
Spectrum Width Of Half Value	$\Delta \lambda$	IF=20mA		35		nm

★Characteristics Diagrams

High Efficiency Red & Orange (GaAsP/GaP)

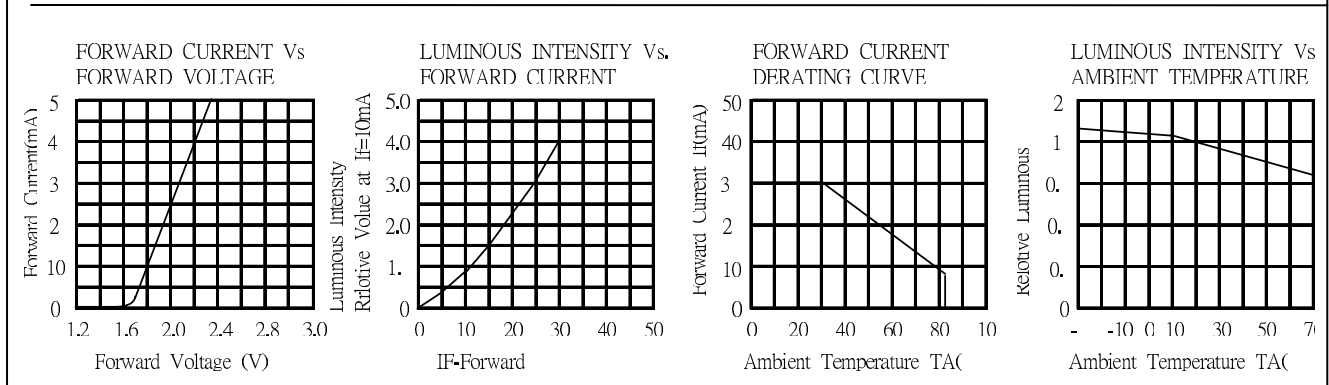

Light Emitting Diode Lamp

Part No: 8-22A-CD35R

Reliability Test

No	Item	Test Condition	Test Hours/Cycles	Samples Tested	Acc./Rej
1	Room Temperature DC Operating Life	Ta=25°C, I _F =20mA	1000 Hrs	76	0/1
2	Thermal Shock	-10°C (5min)→ (10sec)→+100°C (5min)	100 Cycles	76	0/1
3	Temperature Cycle	-40°C (30min) →(5min)→+85 °C (30min)	100 Cycles	76	0/1
4	High Temp./ High Humi. Test	85°C /85%RH	1000 Hrs	76	0/1
5	High Temperature Storage	Ta=100°C	1000 Hrs	76	0/1
6	Low Temperature Storage	Ta= - 40°C	1000 Hrs	76	0/1
7	Soldering Heat	260°C±5°C	5 Seconds	76	0/1