










9.50mm Pitch

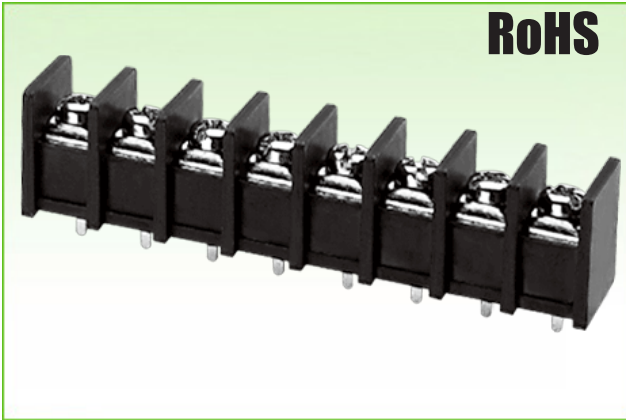

		
Rated Voltage	300V	630V
Rated Current	25A	32A
Insulation Withstand Voltage	2500V / 1Min.	
Rated Impulse Voltage	6000V	
Insulation Resistance	500MΩ or more at DC500V	
Contact Resistance	≤ mΩ	
Temperature Range	-40°C to +105°C	
Wire Range	22-10AWG	0.5mm ² -4mm ²
Strip Length	9-10mm	
Screw Torque Value	0.8-1.0N.m	

Units: mm

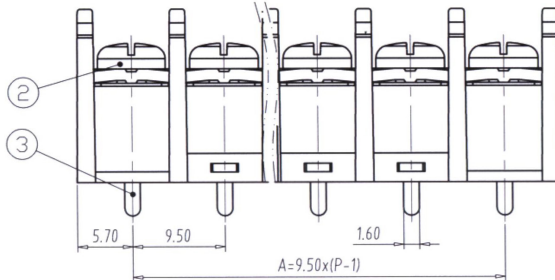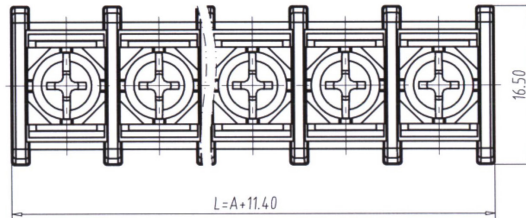

- ① Housing: PA66, UL94V-0
- ② Screw: Steel, M3.5, Nickel Plated
- ③ Solder Pin: Copper Alloy, Tin Plated

Part Numbering System:

BCBN252-950 - XXP - XXX XXX

① ② ③ ④

- ① Series
- ② Number of Poles: 02, 03, 04, ..., 24
- ③ Insulator Color: BLK = Black
- ④ Pin Length: 3.5 = 3.5mm (Standard)

# Pin	2	3	4	5	6	7	8	9	10	11	12	13
Dim L	20.9	30.4	39.9	49.4	58.9	68.4	77.9	87.4	96.9	106.4	115.9	125.4
Dim A	9.5	19	28.5	38	47.5	57	66.5	76	85.5	95	104.5	114
# Pin	14	15	16	17	18	19	20	21	22	23	24	
Dim L	134.9	144.4	153.9	163.4	172.9	182.4	191.9	201.4	210.9	220.4	229.9	
Dim A	123.5	133	142.5	152	161.5	171	180.5	190	199.5	209	218.5	