




Dimensions (Unit:mm):

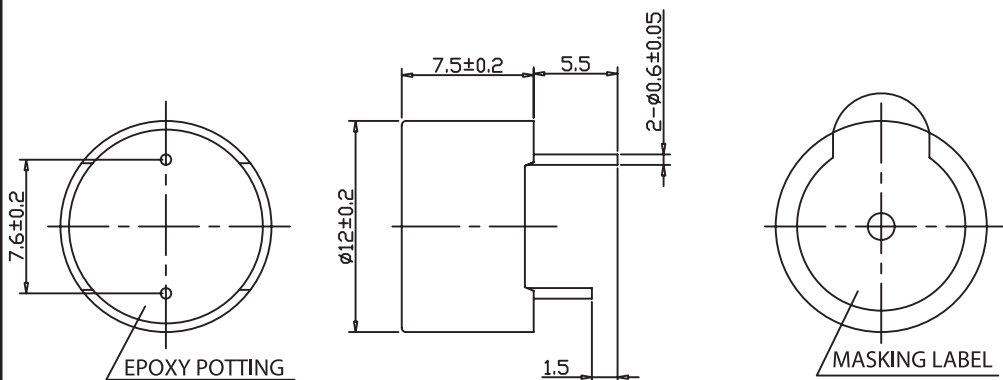

Wave Solder and Wash Allowed

FEATURES:


Housing	Noryl
Color	Black

ELECTRICAL SPECIFICATIONS:

Rated Voltage	3 VDC
Operating Voltage	2~5 VDC
*Current Consumption	≤ 30 mA
*Min. Sound Output at 10cm	83 dB
Tone	Continuous
Resonant Frequency	2.3 ± 0.3 KHz
Case Material	Noryl
Operating Temperature	$-20 \sim +70^{\circ}\text{C}$
Storage Temperature	$-30 \sim +80^{\circ}\text{C}$
Weight	2.0g

*Applying rated voltage (VDC)

Frequency Response:

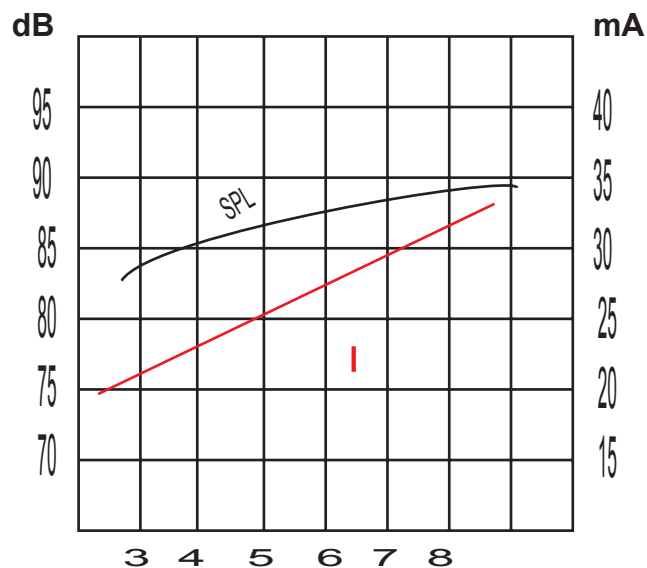

TOLERANCES UNLESS NOTED OTHERWISE X ± XX ± XXX ± 90° FORMED +2° ANGLES -1°	Part Number	
	CMB076-120075-030-83-2K3	
FIRST ANGLE PROJECTION 	Electro-Magnetic Buzzer	
	UNIT	mm
BLIZZ MODE		