



Flat Ribbon Cable

Rated Temp: -20°C to 105°C

Rated Voltage: 300V

Length: 100FT per Roll (Put-Ups)

Color: Gray Jacket with Red Stripe on Leading Edge

Insulation: PVC



Insulation Thickness: 0.9mm

Conductor Center Spacing: 1.27mm (0.050") Center to Center

Conductors: 28AWG (7x36) Stranded Tinned Copper Conductors

Flame Test: FT1, FT2

UL & CSA Style: 2651 VW-1

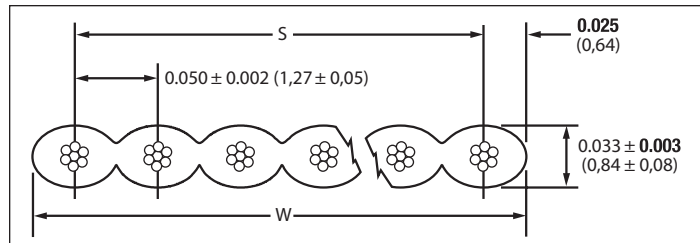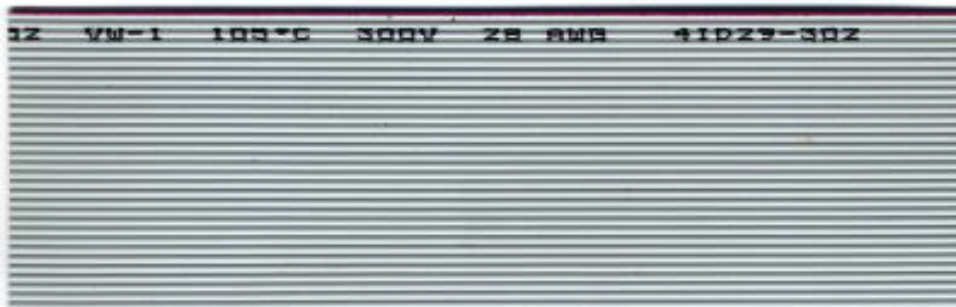

Item Number	Number of Conductors	Nominal Overall Width (W) mm	Nominal Span (S) mm	Weight lbs.
FC-2810	10	12.70	11.43	1.5
FC-2814	14	17.78	16.51	2.0
FC-2816	16	20.32	19.05	2.25
FC-2820	20	25.40	24.13	2.5
FC-2825	25	31.75	30.48	3.25
FC-2826	26	33.02	31.75	3.5
FC-2834	34	43.18	41.91	4.5
FC-2840	40	50.80	49.53	5.0
FC-2850	50	63.50	62.23	6.5
FC-2860	60	76.20	74.93	8.0