


FFT & FFC Series

Threaded Units: Inches (mm)

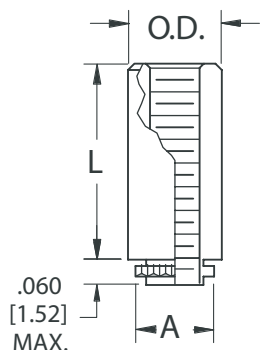


Specifications

Material: Stainless Steel per ASTM-A581/A582

Part Number	Length L	O.D.	A	Thread
FFT2-56-1.70MM	0.065 (1.7)	0.219 (5.6)	0.165 (4.2)	2-56
FFT4-40-1.70MM	0.065 (1.7)	0.219 (5.6)	0.184 (4.7)	4-40
FFT4-40-3.20MM	0.125 (3.2)	0.219 (5.6)	0.184 (4.7)	
FFT4-40-6.40MM	0.250 (6.4)	0.219 (5.6)	0.184 (4.7)	
FFT4-40-9.50MM	0.375 (9.5)	0.219 (5.6)	0.184 (4.7)	
FFT4-40-12.70MM	0.500 (12.7)	0.219 (5.6)	0.184 (4.7)	
FFT6-32-1.70MM	0.065 (1.7)	0.281 (7.1)	0.231 (5.9)	6-32
FFT6-32-3.20MM	0.125 (3.2)	0.281 (7.1)	0.231 (5.9)	
FFT6-32-6.40MM	0.250 (6.4)	0.281 (7.1)	0.231 (5.9)	
FFT6-32-9.50MM	0.375 (9.5)	0.281 (7.1)	0.231 (5.9)	
FFT6-32-12.70MM	0.500 (12.7)	0.281 (7.1)	0.231 (5.9)	

Clear Hole Units: Inches (mm)



Part Number	Length L	O.D.	A	Hole
FFC#4-1.70MM	0.065 (1.7)	0.219 (5.6)	0.184 (4.7)	0.116 (2.9) for # 4
FFC#4-3.20MM	0.125 (3.2)	0.219 (5.6)	0.184 (4.7)	
FFC#4-6.40MM	0.250 (6.4)	0.219 (5.6)	0.184 (4.7)	
FFC#4-9.50MM	0.375 (9.5)	0.219 (5.6)	0.184 (4.7)	
FFC#4-12.70MM	0.500 (12.7)	0.219 (5.6)	0.184 (4.7)	
FFC#6-1.70MM	0.065 (1.7)	0.281 (7.1)	0.231 (5.9)	0.143 (3.6) for #6
FFC#6-3.20MM	0.125 (3.2)	0.281 (7.1)	0.231 (5.9)	
FFC#6-6.40MM	0.250 (6.4)	0.281 (7.1)	0.231 (5.9)	
FFC#6-9.50MM	0.375 (9.5)	0.281 (7.1)	0.231 (5.9)	
FFC#6-12.70MM	0.500 (12.7)	0.281 (7.1)	0.231 (5.9)	