



## SINGLE PHASE BRIDGE RECTIFIER

**GBPC35005 THRU GBPC3510**

**VOLTAGE RANGE  
CURRENT**


**50 to 1000 Volts  
35.0 Ampere**

### FEATURES

- Plastic package has UL flammability classification 94V-0
- Integrally molded heatsink provides very low thermal resistance for maximum heat dissipation
- High forward surge capacity
- Glass passivated chip junction
- High isolation voltage from case to lugs
- High temperature soldering guaranteed: 260°C / 10 seconds
- Available in either lug package (GBPC35005) or wire lead package (GBPC35005W)

### MECHANICAL DATA

- Case: Molded plastic with integrally mounted heatsink
- Terminal: Plated 0.25" (6.35mm) lug or plated 0.040" (1.02mm) diameter lead
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #10 screw, 20 in-lbs Torque max. See Note 1
- Weight: 0.53 ounce, 15.0 gram – GBPC35 and GBPC35-W

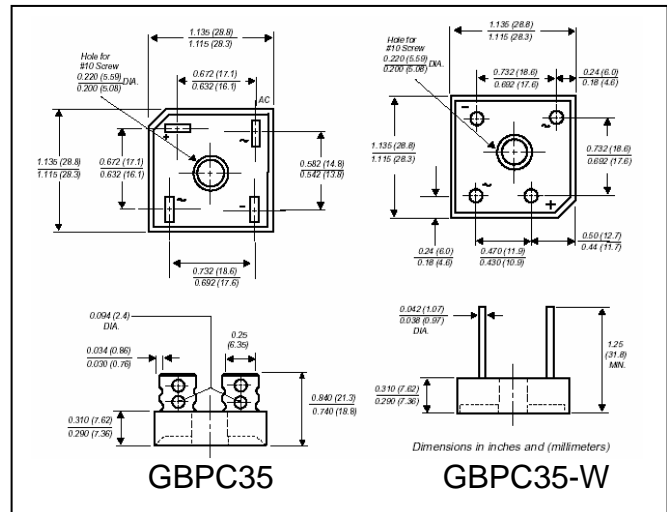

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	GBPC 35005	GBPC 3501	GBPC 3502	GBPC 3504	GBPC 3506	GBPC 3508	GBPC 3510	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (Note 1)	$I_{(AV)}$	35							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	400							Amps
Rating for Fusing ( $t < 8.3mS$ )	$I^2t$	660							$A^2s$
Maximum Instantaneous Forward Voltage drop per Bridge element 17.5A	$V_F$	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	$I_R$	5.0							$\mu A$
		500							$\mu A$
Isolation Voltage from case to lug or lead	$V_{ISO}$	2500							Volts
Typical Junction Capacitance per leg (Measured at 1.0MHz and applied reverse voltage of 4.0V)	$C_J$	300							pF
Typical Thermal Resistance per leg	$R_{\theta JC}$	1.4							$^{\circ}C/W$
Operating Junction Temperature Range	$T_J$	(-55 to +150)							$^{\circ}C$
Storage Temperature Range	$T_{STG}$	(-55 to +150)							$^{\circ}C$

### Notes:

1. Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #10 screw



## RATINGS AND CHARACTERISTIC CURVES GBPC35005 THRU GBPC3510

FIG.1-MAXIMUM OUTPUT RECTIFIED CURRENT

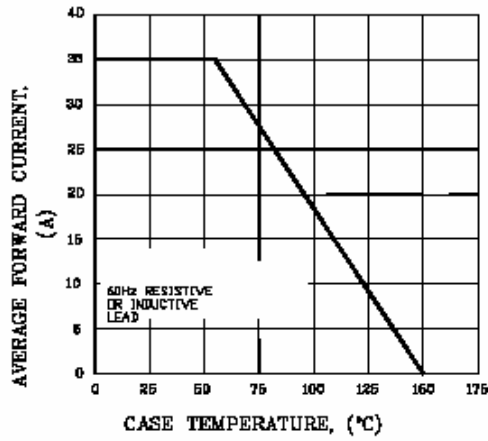


FIG.2-MAXIMUM OUTPUT RECTIFIED CURRENT

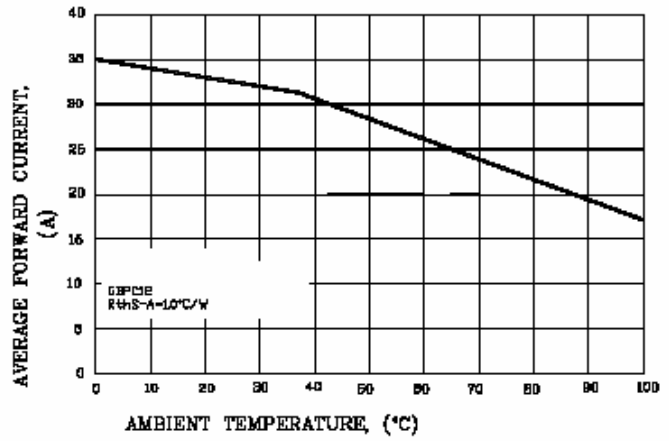


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

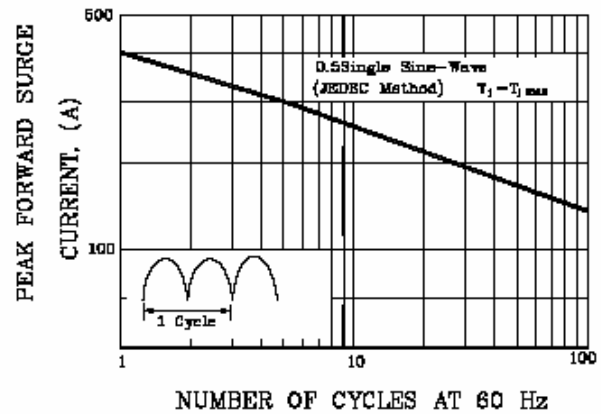


Fig. 3 — Maximum Power Dissipation

