

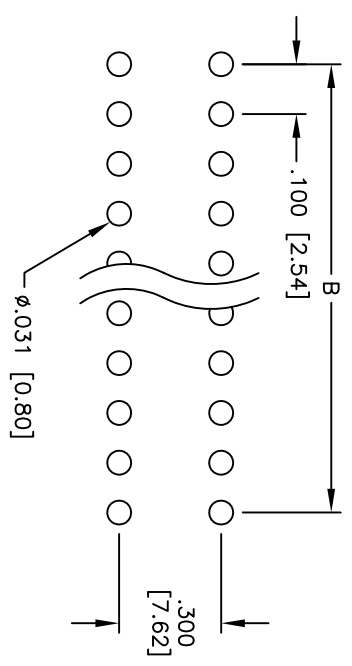
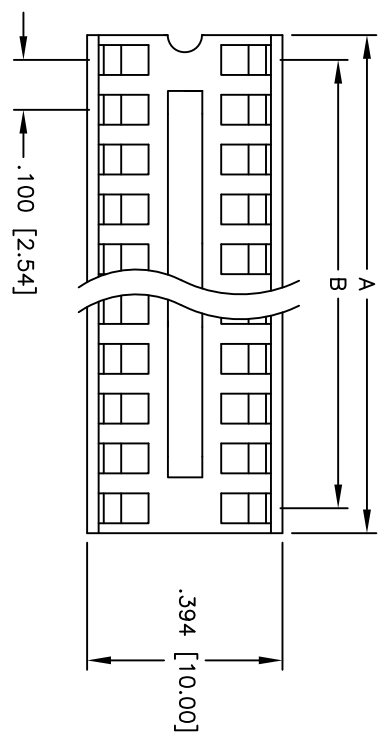


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: _____
 DATE: _____ TITLE: _____

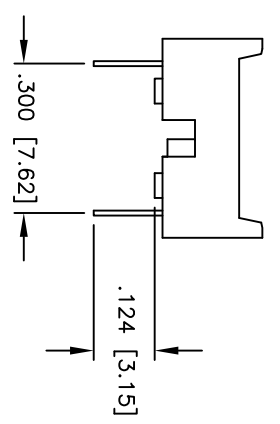

PCB LAYOUT

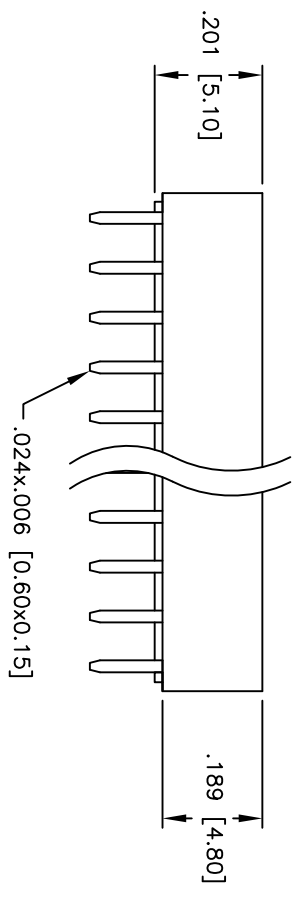

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
Plating:
 Tin over Copper underplate overall
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55°C to +105°C
Environmental:
 Lead free, RoHS compliant

Positions: 6, 8, 14, 16, 18, 20, 22, 24, 28, & 32
 A = .100 [2.54] x No. of Positions Per Row
 B = .100 [2.54] x No. of Spaces Per Row

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IC SOCKET, .300" ROW SPACING
 TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES	INCHES	HOLES
.X ± .10	ØX ± .10	.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010		
APPROVALS	DATE	APPROVALS	DATE
DRAWN	SS	1/28/05	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	ICS-3XX-T	MKS	
REF:		SHEET	1 OF 1

