

FEATURES:


- Non-inductive construction.
- Self-healing property.
- Space-saving miniature size.
- High moisture resistance.
- Good solderability

APPLICATIONS:

They are ideal for blocking, coupling, filtering, by-pass, timing circuits and other general purpose usage.

SPECIFICATIONS:

Rated Voltage (RV)	1100, 250, 400, 630 VDC
Capacitance Range	0.01 μ F ~ 10.0 μ F
Capacitance Tolerance	\pm 5%(J), \pm 10%(K), \pm 20%(M)
Temperature Range	-40°C to 85°C
Dissipation Factor (DF)	1.0% max at 1KHz 25°C
Testing Voltage (TV)	160% of RV for 60sec
Insulation Resistance (RV) (measured at RV or 500VDC whichever is smaller at 25°C)	$C \leq 0.33\mu\text{F}$ and $RV \leq 100\text{VDC}$, $IR \geq 15000\text{M}\Omega$ (MIN) $C > 0.33\mu\text{F}$ and $RV \leq 100\text{VDC}$, $IR \geq 5000\text{M}\Omega \mu\text{F}$ (MIN) $C \leq 0.33\mu\text{F}$ and $RV > 100\text{VDC}$, $IR \geq 30000\text{M}\Omega$ (MIN) $C > 0.33\mu\text{F}$ and $RV > 100\text{VDC}$, $IR \geq 10000\text{M}\Omega \mu\text{F}$ (MIN)

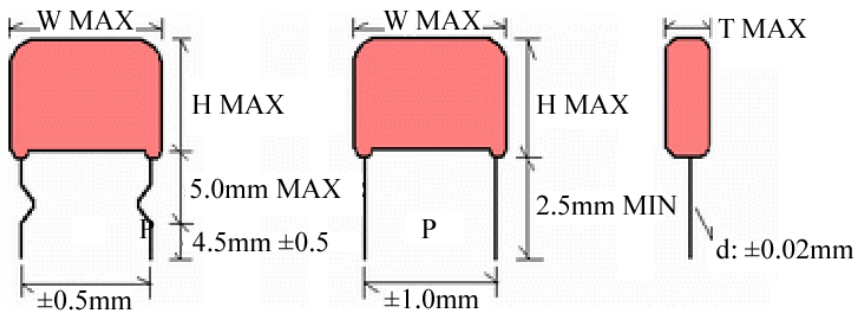

CODE	Cap.	100VDC				250VDC				400VDC				630VDC			
		W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max
102	1000pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
222	2200pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
332	3300pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
472	4700pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
562	5600pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
682	6800pF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
103	0.010 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.0	5.5	10.0
153	0.015 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	10.5	6.0	10.0
223	0.022 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	13.5	12.0	7.0	10.0
333	0.033 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	18.5	12.0	7.0	15.0
473	0.047 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	10.0	18.5	12.5	7.5	15.0
683	0.068 μ F	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	15.0	18.5	14.0	8.0	15.0

Please contact us for special case or items not listed.



METALLIZED POLYESTER FILM CAPACITOR

CODE	Cap.	100VDC				250VDC				400VDC				630VDC			
		W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max	W Max	H Max	T Max	P Max
104	0.10µF	13.5	9.0	5.5	10.0	13.5	9.5	5.5	10.0	13.5	9.5	5.5	15.0	18.5	15.5	10.0	15.0
154	0.15µF	13.5	9.0	5.0	10.0	13.5	13.0	7.0	10.0	18.5	12.5	7.5	15.0	23.5	16.5	9.5	20.0
224	0.22µF	13.5	10.0	5.5	10.0	18.5	11.0	6.5	15.0	23.5	14.5	7.5	20.0	23.5	19.0	11.0	20.0
334	0.33µF	18.5	10.0	5.5	15.0	18.5	12.5	7.0	15.0	23.5	16.0	9.0	20.0	31.0	19.5	11.0	27.5
474	0.47µF	18.5	11.0	6.5	15.0	23.5	12.5	7.5	20.0	23.5	18.5	10.0	20.0	31.0	22.0	12.5	27.5
684	0.68µF	18.5	12.5	7.5	15.0	23.5	14.5	8.5	20.0	31.0	18.0	10.0	27.5	34.0	24.5	14.0	30.0
105	1.0µF	18.5	14.0	8.0	15.0	18.5	14.0	8.0	15.0	31.0	20.5	12.0	27.5	28.5	19.4	10.8	27.5
155	1.5µF	23.5	14.5	8.5	20.0	23.5	19.0	11.5	20.0	34.0	24.0	13.0	30.0	42.0	28.5	18.0	37.5

Please contact us for special case or items not listed.