



ELECTRICAL SPECIFICATIONS

All measurements are taken at +25° at 1KHz and 65% relative humidity, unless otherwise stated.

INTRODUCTION

RSF Series is a group of electric power type highly reliable fixed resistors with special metal oxide film thermochemically burned on the high heat conductive base material. They include those of flame-resisting coating type and nonflammable coating type and are of uniform quality produced through the most modern production and quality control system. They are most reliable products easily used for various kinds of electronic devices and instruments.

RSS is a group of small-sized metal oxide film resistor, apply high aluminum content ceramic cores with performance for compact sizes.

FEATURES

- Low cost, prompt delivery.
- High power-to-size ratio for significant space savings.
- Excellent long-term stability.
- Complete flameproof construction.
- High surge/overload capability.
- Controlled temperature coefficient.
- Non-inductive design.
- Wide resistance range.
- Standard tolerance: $\pm 1\%$, $\pm 2\%$, $\pm 5\%$
- Coating and marking resist Trichlorethylene, and other cleaning agents.
- Improved stability, dissipations, TCR available.
- 1/4 - 3W apply color code, 4 - 7W apply graphic marking.

DESCRIPTION

MEGASTAR-OHM Metal Oxide Resistors offer excellent performance in applications where stability and uniformity of characteristics are desired. They provide lower cost alternatives to Carbon Composition Resistors and General Purpose Metal Films. Metal Oxides also can replace many lower power General Purpose wirewound applications, saving both money and time, with shorter delivery cycles. These Metal Oxides meet overload tests in accordance with UL specification #1412 without producing a fire hazard. (UL #1412 is the industry standard for fusing resistors and temperature limited resistors.) These Metal Oxides withstand solvents test in accordance with article MIL-STD-202E without producing mechanical or electrical damage.

Part Numbering system

RSF

| Type |
|------|
| RSF |
| RSS |

1

| Rated Power |
|-------------|
| 1/4W |
| ↓ |
| 10W |

5%

| Resistance tolerance |
|----------------------|
| $\pm 5\%$ |
| $\pm 2\%$ |
| $\pm 1\%$ |

2K2


| Nominal Resistance | |
|--------------------|--------------------------|
| Code | Description |
| 2R2 | 2.2 OHMs |
| 22R | 22 OHMs |
| 2K2 | 2.2x10 ³ OHMs |
| 22K | 22x10 ³ OHMs |
| 22M | 22x10 ⁶ OHMs |

TR

| Packaging | |
|-----------|-----------------|
| Code | Description |
| B | Bulk |
| TR | Tape & Reel |
| TB | Tape & Ammo Box |
| MF | Forms |
| MK | Forms |
| FK | Forms |
| PATR | Avisert T/R |
| PNTR | Panasert T/R |



Dimensions

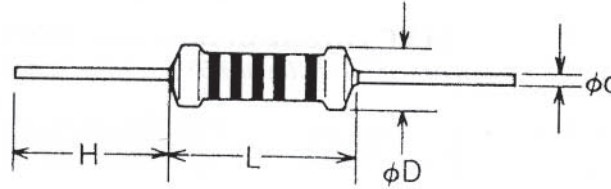

GENERAL SPECIFICATIONS

| Type | | Dimensions | | | | Max. Working V. | Max. Overload V. | Resistance Range |
|------|------|------------|---------|-----------|---------|-----------------|------------------|------------------|
| RSS | RSF | L | D | d | H (MIN) | | | ±5% (J) |
| 1/2W | 1/4W | 6.5±1 | 2.3±0.5 | 0.50±0.05 | 25 | 250V | 500V | 0.1Ω -1MΩ |
| 1W | 1/2W | 9±1 | 3.5±0.5 | 0.65±0.02 | 25 | 300V | 600V | 0.1Ω -1MΩ |
| 2WS | 1/2W | 9±1 | 3±0.5 | 0.8±0.03 | 27 | 350V | 700V | 0.1Ω -1MΩ |
| 2W | 1W | 12±1 | 4.5±0.5 | 0.8±0.03 | 27 | 350V | 700V | 0.1Ω -1MΩ |
| 3W | 2W | 16±1 | 5.5±0.5 | 0.8±0.03 | 27 | 350V | 700V | 0.1Ω -1MΩ |
| 5W | 3W | 25±1 | 8.5±0.5 | 0.8±0.03 | 27 | 500V | 1000V | 0.5Ω -1MΩ |
| 6W | 4W | 32±1 | 8.5±0.5 | 0.8±0.03 | 27 | 500V | 1000V | 10Ω -1Ω |
| 7W | 5W | 41±1 | 8.5±0.5 | 0.8±0.03 | 27 | 750V | 1000V | 10Ω -150KΩ |
| 10W | 7W | 53±1 | 8.5±0.5 | 0.8±0.03 | 27 | 750V | 1000V | 10Ω -150KΩ |

CHARACTERISTICS

| Requirements | Performance | Test Method | |
|---------------------------------|--|----------------------------|-------------|
| | | JIS-C-5202 | MIL-STD-202 |
| Operating Temp. Range | -55°C ~ +200°C | ----- | ----- |
| Temp. Coefficient (ppm/°C) | ±350* | 5.2 | Method 304 |
| Short Time Overload | ³ Rmax ≤ ±(1% + 0.05Ω) | 5.5-A | ----- |
| Resistance to Soldering Heat | ³ Rmax ≤ ±(1% + 0.05Ω) | 6.4. 350°C 3 sec | Method 210 |
| Temp. Cycling | ³ Rmax ≤ ±(1% + 0.05Ω) | 7.4. -55°C/85°C, 5 cycles | Method 107 |
| Moisture Resistance | ³ Rmax ≤ ±5% | 7.9 95%RH on-off 1,000hrs. | Method 106 |
| Load Life | ³ Rmax ≤ ±5% | 7.10 70°C on-off 1,000hrs. | Method 108 |
| Dielectric Withstanding Voltage | ³ Rmax ≤ ±(5% + 0.05Ω) | 5.7-A | Method 301 |
| Insulation Resistance | >10 ⁴ MΩ | 5.6-A | ----- |
| Non-Combustibility | The resistor shall withstand Overload test in accordance with Article UL 492.2.13 without causing a fire hazard. | | |


*NOTE: TCR±200ppm is also available; consult the factory.




RSF, RSS

LEADFREE
RoHS Compliant


CURRENT NOISE

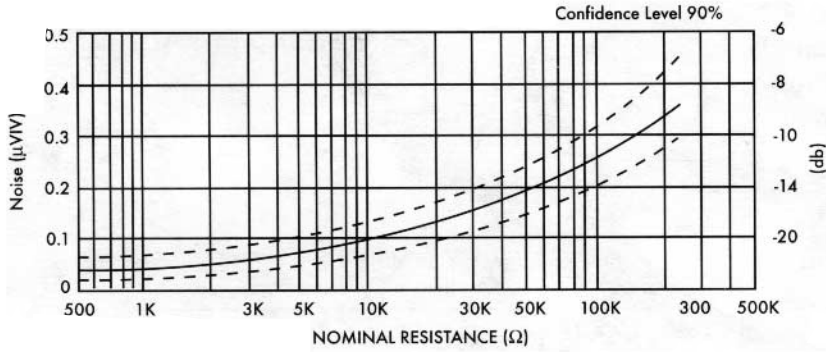


SURFACE TEMP. RISE

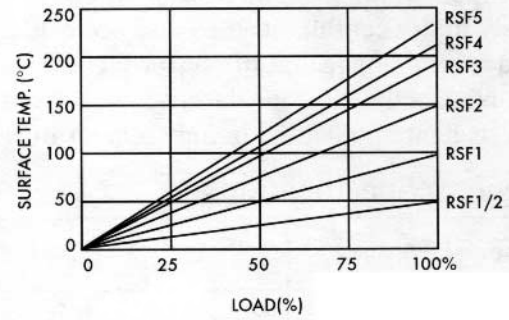

TEMPERATURE RISE

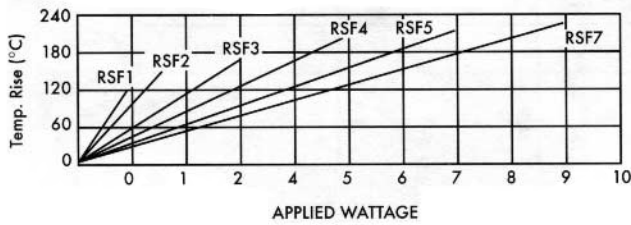


DERATING CURVE

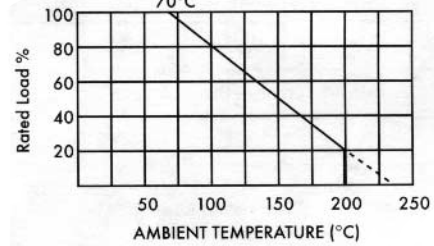


PACKAGING STYLES UPON REQUEST


MF FORM

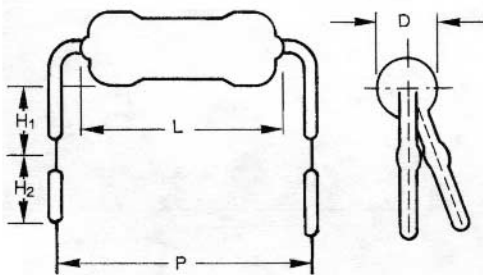

MK FORM

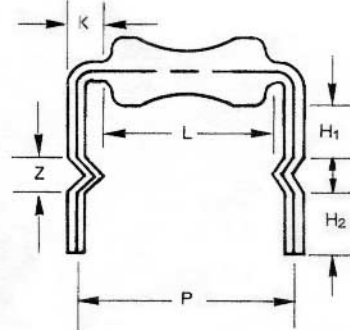

FK FORM

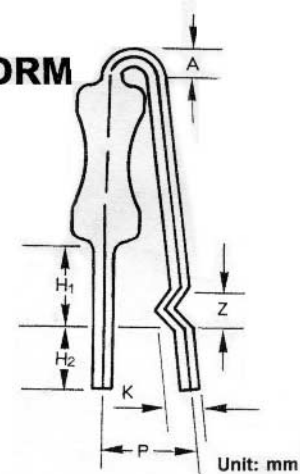

Unit: mm

| RSS | RSF | L ± 1 | D ± 0.5 | P | H ₁ | H ₂ ± 1 |
|-----|------|-------|---------|----------|----------------|--------------------|
| 1W | 1/2W | 9 | 3.5 | 15 ± 1.5 | 7 ± 1 | 4.5 |
| 2W | 1W | 11 | 4.5 | 15 ± 1.5 | 7 ± 1 | 4.5 |
| 3W | 2W | 15 | 5.5 | 20 ± 2 | 10 ± 2 | 4.5 |
| 5W | 3W | 24 | 8.5 | 30 ± 2 | 13 ± 2 | 4.5 |

| RSS | RSF | D ± 0.5 | L ± 1 | H ± 3 | d ± 0.02 | P + 0.5 | H ₁ ± 1 | H ₂ ± 1 | Z ± 1 | K ± 0.5 | A ± 0.5 |
|-----|------|---------|-------|-------|----------|---------|--------------------|--------------------|-------|---------|---------|
| 1W | 1/2W | 3 | 9 | 30 | 0.7 | 15 | 5 | 5 | 3 | 2 | 3 |
| 2W | 1W | 4 | 11 | 33 | 0.8 | 15 | 5 | 5 | 3 | 2 | 3 |
| 3W | 2W | 4.5 | 15 | 33 | 0.8 | 20 | 5 | 5 | 3 | 2 | 3 |
| 5W | 3W | 8.5 | 24 | 38 | 0.8 | | | | | | |