



SURFACE MOUNT RECTIFIER

S3A THRU S3M


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mount applications
- Low profile package.
- Built-in strain relief, ideal for automated placement
- Glass passivated chip junction
- High temperature soldering: 260°C/10 seconds at terminals.

MECHANICAL DATA

- Case: JEDEC DO-214AB molded plastic body over passivated chip
- Terminals: Solder plated, solderable per MIL - STD - 750 method 2026
- Polarity: Color band denotes cathode end.
- Weight: 0.007 ounce, 0.25 gram

DO-214AB MODIFIED J-BEND

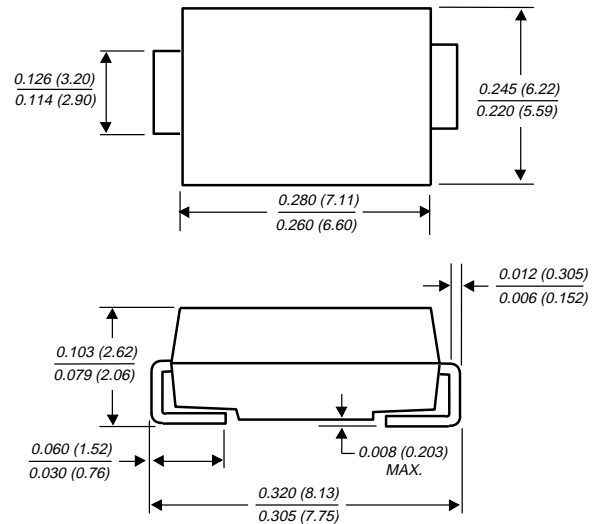

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	S3A	S3B	S3D	S3G	S3J	S3K	S3M	UNITS
Device marking code		SA	SB	SD	SG	SJ	SK	SM	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at $T_L=75^\circ\text{C}$ (NOTE 3)	$I_{(AV)}$	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_L=75^\circ\text{C}$	I_{FSM}	100.0							Amps
Maximum instantaneous forward voltage at 2.5A	V_F	1.15							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	10.0 250.0							μA
Typical reverse recovery time (NOTE 1)	t_{rr}	2.5							μs
Typical junction capacitance (NOTE 2)	C_J	60.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	47.0 13.0							$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3 x 0.3" (8.0 x 8.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES S3A THRU S3M

