


### SPECIFICATIONS:

- Contact Rating: 5A @125VAC or 28VDC /3A @250VAC
- Contact Resistance: 10mΩ Max. Initial
- Insulation Resistance: 1,000MΩ Min.
- Withstand Voltage: 1,500VAC
- Mechanical Life: 6,000 Cycles
- Operating Temperature: -30 to +85°C


### MATERIAL:

- Case: Diallyl Phthalate (DAP)(UL94-V0)
- Actuator: Copper Alloy, Chrome Plated
- Bushing: Copper Alloy, Nickel Plated
- Housing: Stainless Steel
- Switch Support: Brass, Tin Plated
- Contacts & Terminals: Copper Alloy, Silver Plated
- Terminal Seal: Epoxy

### DIMENSIONS (Units: Inches/mm):

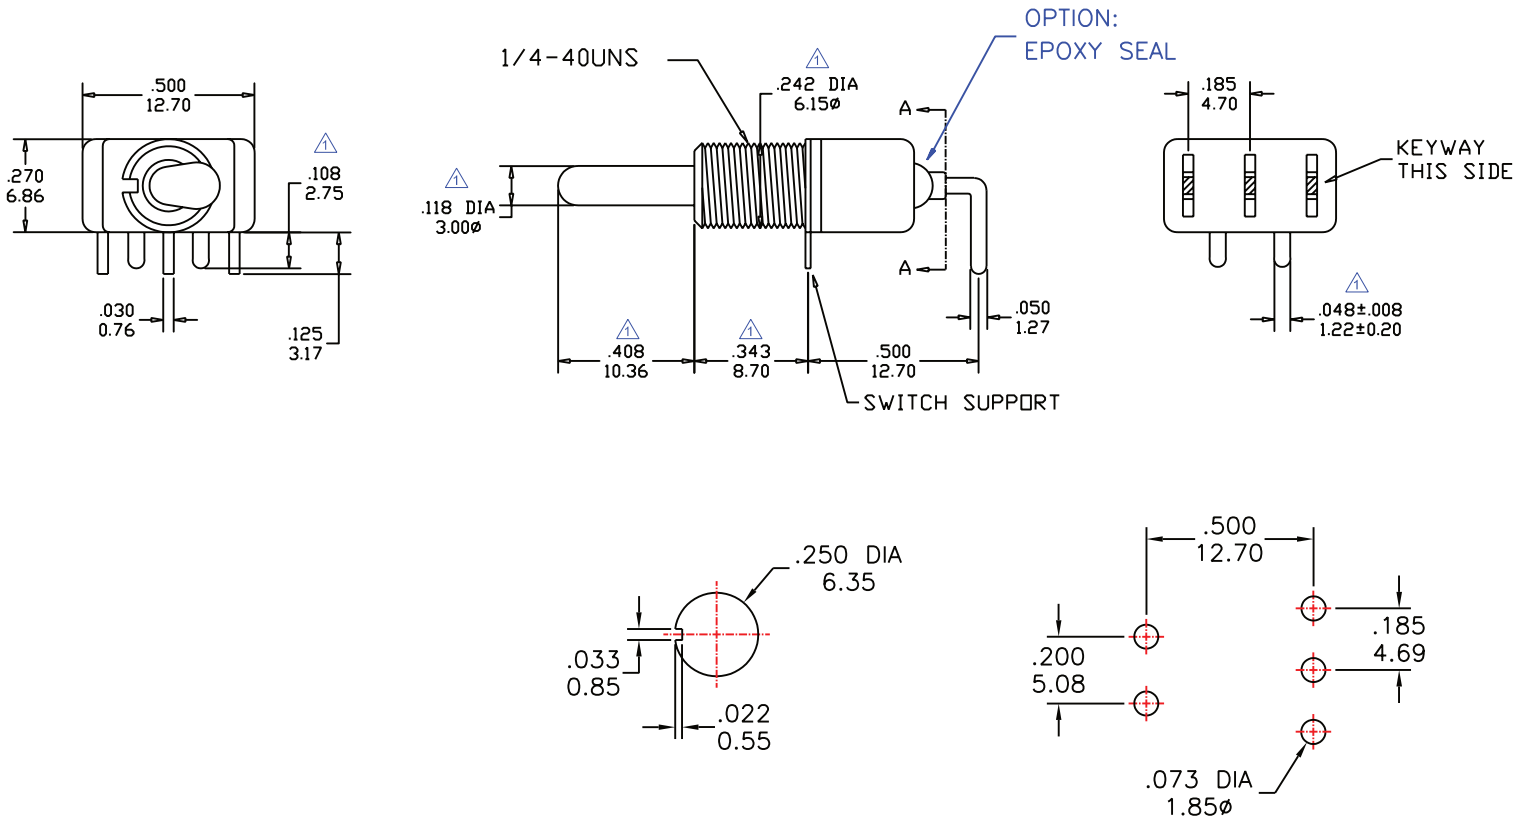

	Switching Position		
Term. Comm.	2-3	OPEN	2-1



Note: Add "A" at the end of the part number for standard accessories.