



VZT/VZU Series

Features

- $4\phi \sim 10\phi$, 105°C , 2,000 ~ 5,000 hours assured
- Capacitance more than VZS series
- Designed for surface mounting on high density PC board
- RoHS compliance

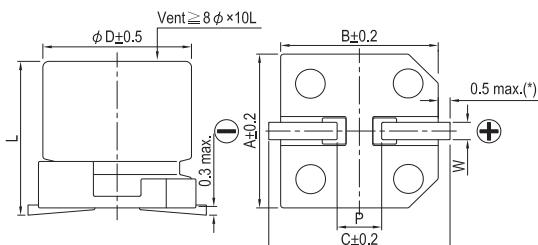


Marking color: Black

Specifications

Items	Performance												
Category Temperature Range	$-55^\circ\text{C} \sim +105^\circ\text{C}$												
Capacitance Tolerance	$\pm 20\%$ (at 120 Hz, 20°C)												
Leakage Current (at 20°C)	$I = 0.01CV$ or $3 (\mu\text{A})$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF , V = rated DC working voltage in V												
Tanδ (at 120 Hz, 20°C)	Rated Voltage	6.3	10	16	25	35	50						
	Tanδ (max)	0.26	0.19	0.16	0.14	0.12	0.10						
	When the capacitance exceeds $1,000\mu\text{F}$, 0.02 shall be added every $1,000\mu\text{F}$ increase.												
Low Temperature Characteristics (at 120 Hz)	Impedance ratio shall not exceed the values given in the table below.												
	Rated Voltage	6.3	10	16	25	35	50						
	Impedance Ratio	$Z(-25^\circ\text{C})/Z(+20^\circ\text{C})$	4	3	2	2	2						
		$Z(-55^\circ\text{C})/Z(+20^\circ\text{C})$	8	5	4	3	3						
Endurance of VZT Series	Test Time	2,000 Hrs											
	Capacitance Change	Within $\pm 30\%$ of initial value											
	Tanδ	Less than 200% of specified value											
	Leakage Current	Within specified value											
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C .												
Endurance of VZU Series	Test Time	3,000 Hrs for voltage = 6.3 V 5,000 Hrs for voltage ≥ 10 V											
	Capacitance Change	Within $\pm 35\%$ of initial value											
	Tanδ	Less than 300% of specified value											
	Leakage Current	Within specified value											
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 3,000 ~ 5,000 hours at 105°C .												
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance.												
Ripple Current and Frequency Multipliers	Frequency (Hz)	50, 60	120	1k	10k up								
	Cap. (μF)												
	≤ 470	0.50	0.65	0.85	1.00								
	$470 < C \leq 2,200$	0.55	0.70	0.90	1.00								

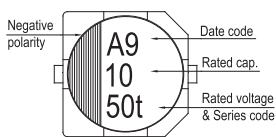
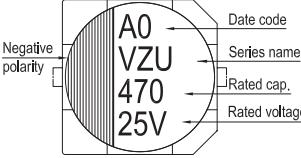
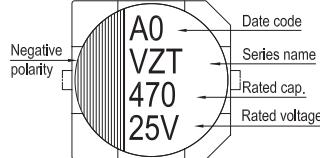
Diagram of Dimensions



Lead Spacing and Diameter Unit: mm						
ϕD	L	A	B	C	W	$P \pm 0.2$
4	5.8 ± 0.3	4.3	4.3	5.1	$0.5 \sim 0.8$	1.0
5	5.8 ± 0.3	5.3	5.3	5.9	$0.5 \sim 0.8$	1.5
6.3	5.8 ± 0.3	6.6	6.6	7.2	$0.5 \sim 0.8$	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	$0.5 \sim 0.8$	2.0
8	10 ± 0.5	8.3	8.3	9.0	$0.7 \sim 1.1$	3.1
10	10 ± 0.5	10.3	10.3	11	$0.7 \sim 1.3$	4.7

(*): For $4 \sim 6.3\phi$ is 0.4 max.

Marking

 $\phi D \leq 6.3\text{mm}$  $\phi D = 8 \sim 10 \text{ mm}$ 

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: Ω at 100k Hz, 20°C

Dimension and Permissible Ripple Current

Cap. (μF) Contents	Rated Volt. (V _{DC})	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)		
		ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA	ϕ D×L	Imp.	mA
10	100																4×5.8 5×5.8	2.30 0.88	85 165
22	220										4×5.8	0.85	160	4×5.8	0.85	160	5×5.8	0.88	165
33	330									4×5.8	0.85	160	5×5.8	0.36	240				
47	470							4×5.8	0.85	160	5×5.8	0.36	240	5×5.8	0.36	240	6.3×5.8	0.68	195
68	680				4×5.8	0.85	160	5×5.8	0.36	240	5×5.8	0.36	240	6.3×5.8	0.26	300			
100	101	4×5.8	0.85	160				5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×5.8	0.26	300	6.3×7.7	0.34	350
150	151				5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×7.7	0.16	600	6.3×7.7	0.16	600			
220	221	5×5.8	0.36	240	6.3×5.8	0.26	300	6.3×5.8	0.26	300	6.3×7.7	0.16	600				8×10*	0.18	670
330	331	6.3×5.8	0.26	300	6.3×7.7	0.16	600	6.3×7.7	0.16	600				8×10*	0.08	850	10×10*	0.12	900
470	471	6.3×7.7	0.16	600	6.3×7.7	0.16	600				8×10*	0.08	850						
560	561															10×10*	0.06	1,190	
680	681	6.3×7.7	0.16	600				8×10*	0.08	850									
820	821													10×10*	0.06	1,190			
1,000	102				8×10*	0.08	850	10×10*	0.06	1,190									
1,500	152	8×10*	0.08	850	10×10*	0.06	1,190												
2,200	222	10×10*	0.06	1,190															

Note: For the case sizes with the mark of " * ", the endurance requirements of VZU series are available.

Part Numbering System

VZT Series	1500 μF	±20%	6.3V	Carrier Tape	-	8 ϕ × 10L	Pb-free and PET coating case
VZT	152	M	0J	TR	-	0810	Lead Wire and Coating Type
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	

Note: 1. If the life time of product was required 5,000 hours, the series name is VZU.

2. For more details, please refer to "Part Numbering System (SMD Type)" on page 15.