
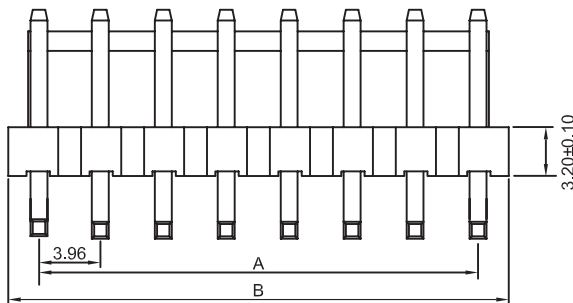
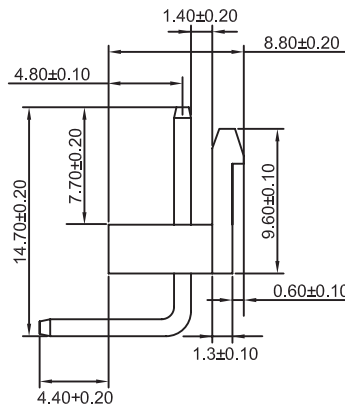


Specifications

Current Rating: 5 Amp
 Voltage Rating: 250V AC, DC
 Operating Temperature : -25°C ~ +85°C
 Contact Resistance: 10 m ohms max.
 Insulation Resistance: 1000M ohms min.
 Withstanding Voltage: 2200V AC / minute
 Terminal Material: Brass / Tin-plated
 Material: Nylon 66, UL94V-2

Recommended P.C. Board Hole Layout

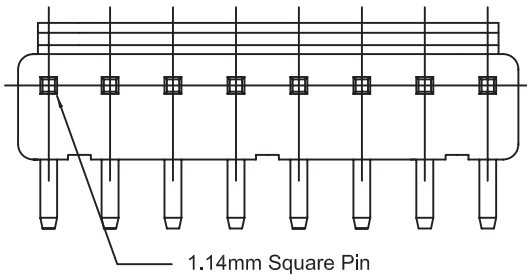

Part Numbering System

W39696 R - XX T

Series

Function

R = Right Angle

of Contact

02 ~ 14

Contact Plating

T = Tin

Contacts	Dimension mm	
	A	B
2	3.96	7.92
3	7.92	11.92
4	11.88	15.84
5	15.84	19.84
6	19.80	23.80
7	23.76	27.88
8	27.72	31.74
9	31.68	35.86
10	35.64	39.90
11	39.60	43.84
12	43.56	47.92
13	47.52	51.72
14	51.48	55.92

General Tolerance	
X. ± 0.50	X.° ± 5°
.X ± 0.20	.X° ± 2°
.XX ± 0.10	.XX° ± 1°
Units : mm	